



AN-SSL-I

Split type solar street light

CE **RoHS** **P65 IK10**

INTRODUCTION

01 PART ONE
PRODUCT ADVANTAGE


02 PART TWO
SPECIFICATIONS

03 PART THREE
OPTICAL FEATURE

04 PART FOUR
DIMENSION FIGURE

05 PART FIVE
DETAIL

06 PART SIX
PACKAGE DETAIL


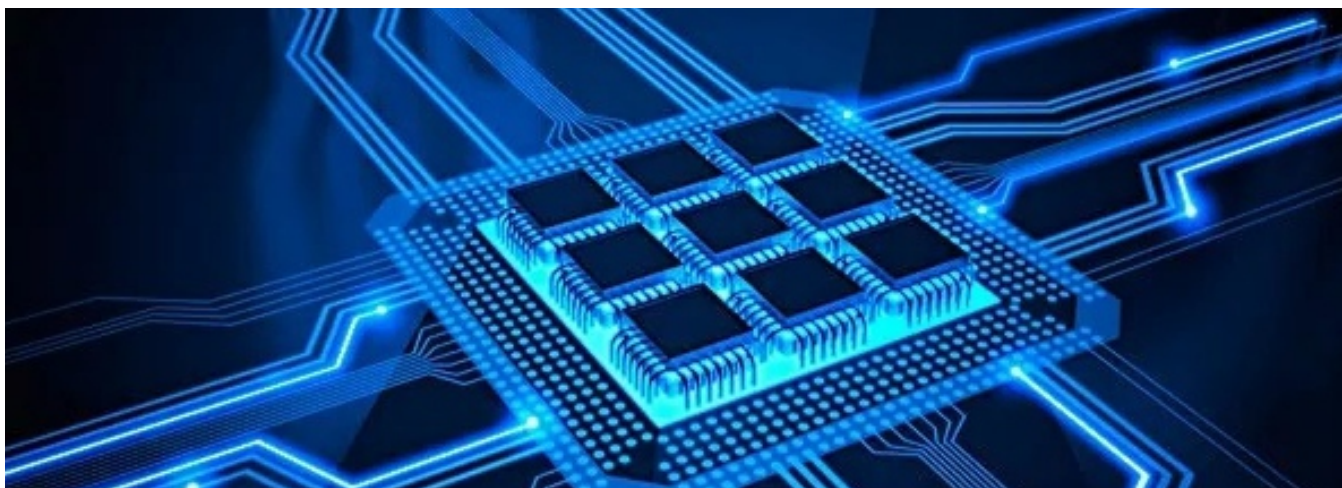


01

PART ONE
PRODUCT ADVANTAGE

ADJUSTABLE ANGLE LED MODEL

Each LED module can adjust
the angle independently.

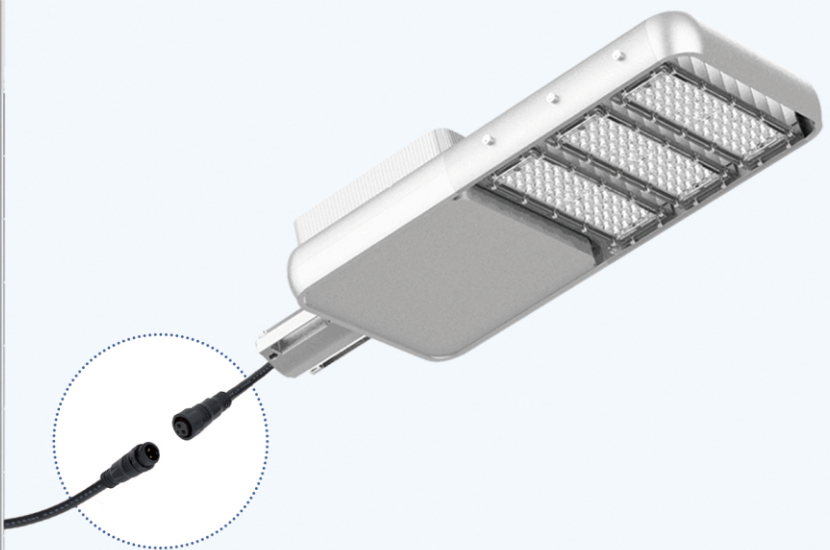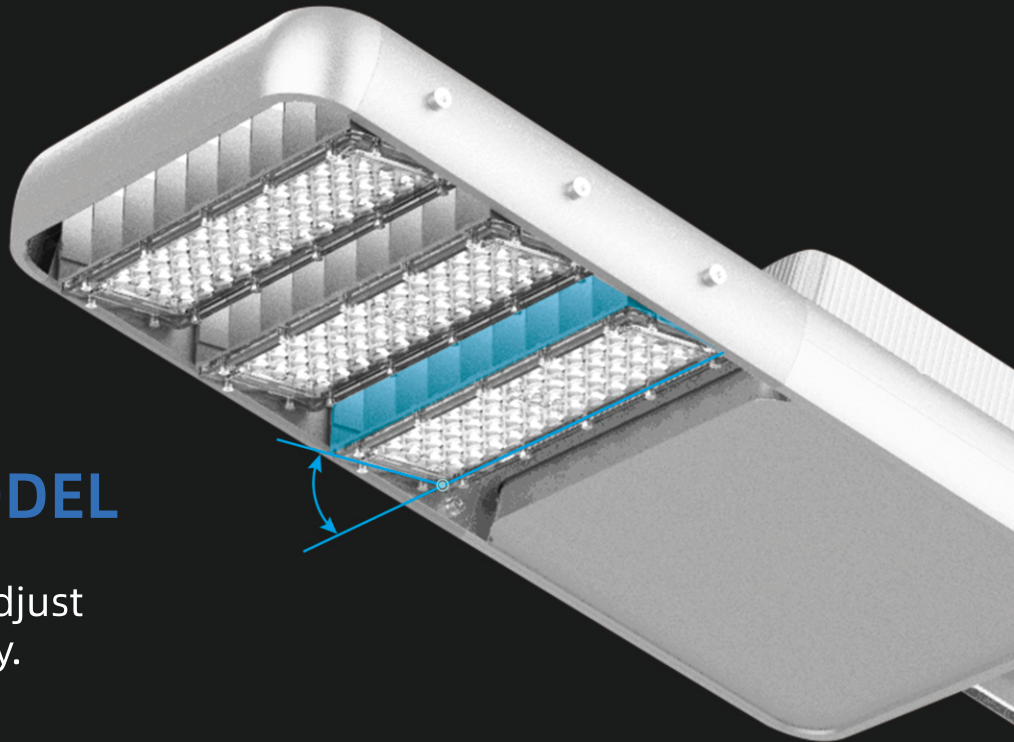

EASY TO INSTALL

It take only one step to
light up.

01

PART ONE
PRODUCT ADVANTAGE



**WATERPROOF
CONNECTOR**

IP65 waterproof cable.

SUPER BIG BATTERY BOX

Built in large capacity
LiFePo4 battery.



SUPER BIG
BATTERY BOX




5-7
Rainy Days




02

PART TWO
SPECIFICATIONS


Model	AN-SSL-I					
Power	30W	50W	60W	80W	100W	120W
LED	96pcs 3030	144pcs 3030	144pcs 3030	192pcs 3030	240pcs 3030	240pcs 3030
Luminous Flux	170ml/w					
LiFePO4 Battery	12.8V/24AH	12.8V/36AH	12.8V/42AH	12.8V/57AH	12.8V/63AH	12.8V/72AH
Mono Solar Panel	18V40W	18V65W	18V80W	18V100W	18V150W	18V200W
Solar Charging Time	6-8 hours by bright sunlight					
Lighting Time In Rainy Day	5-7 days					
Lighting Mode	3hrs 100%+2hrs 80%+7hrs 25% Can be customized based on customer needs					
Material	Aluminium alloy + PMMA					
IP/IK Class	IP 65 / IK 10					
Work Temperature	-25℃ to 65℃					
IInstall Height	4-6m	6-8m	7-9m	8-10m	9-12m	10-12m

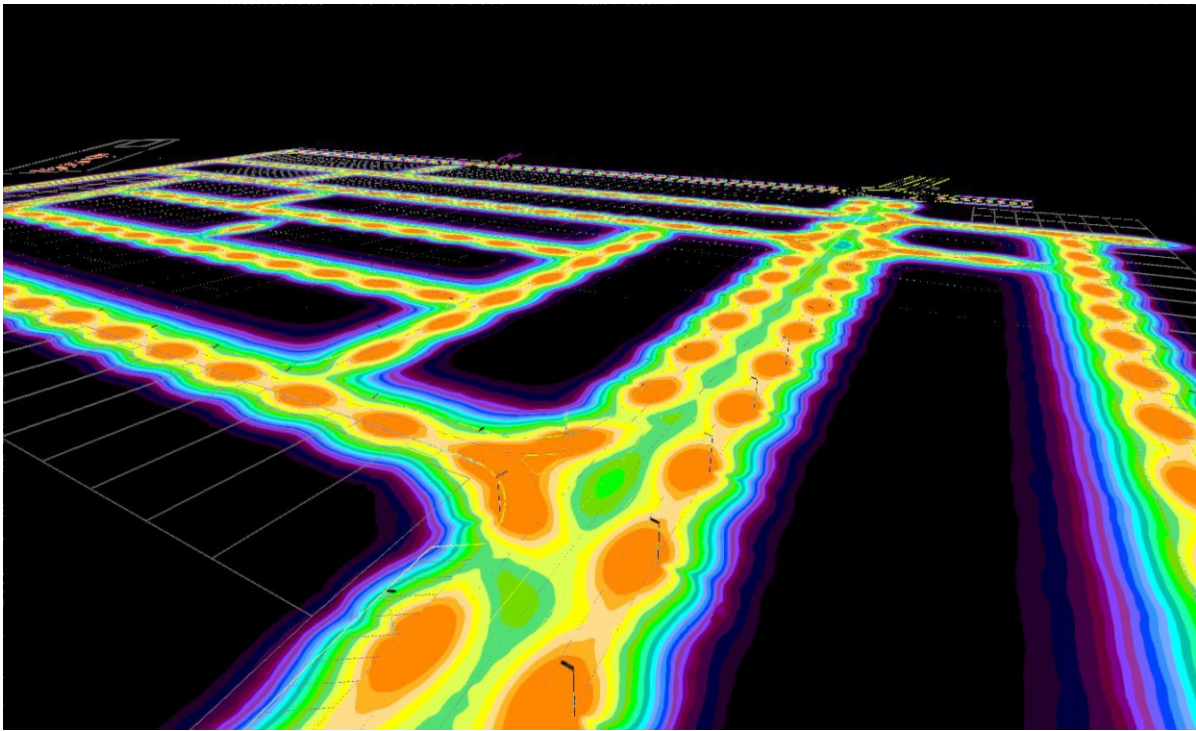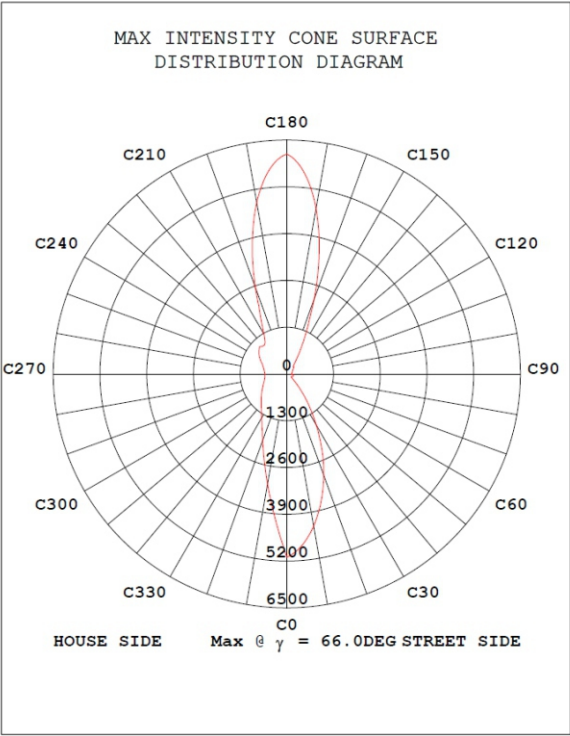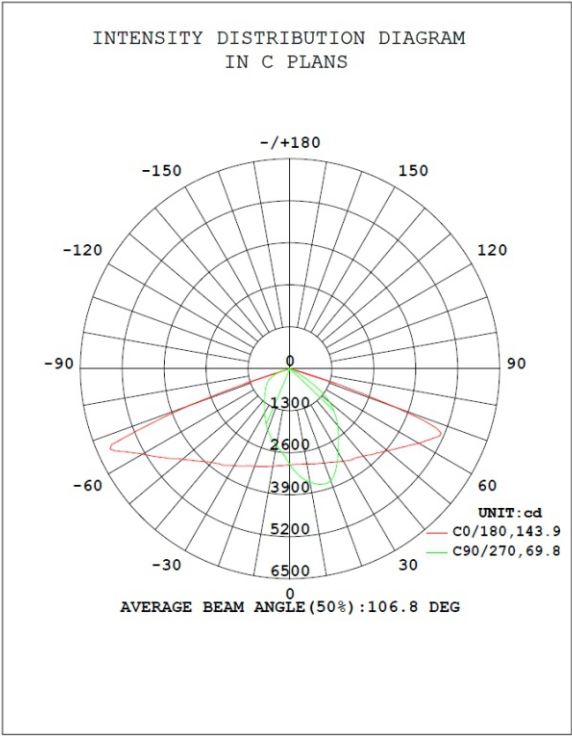


04 PART FOUR
DIMENSION FIGURE

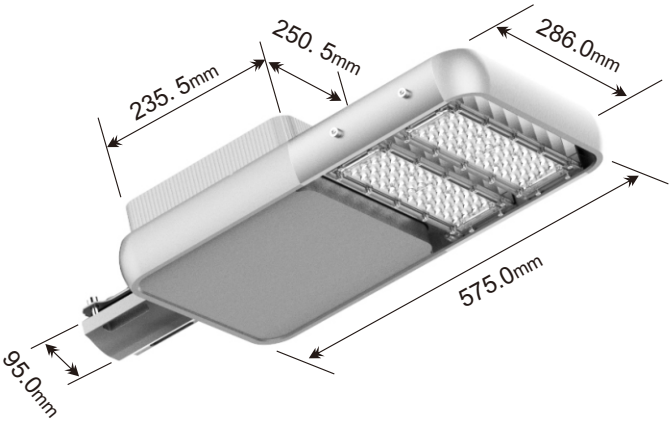


AN-SSL-I 30-40W

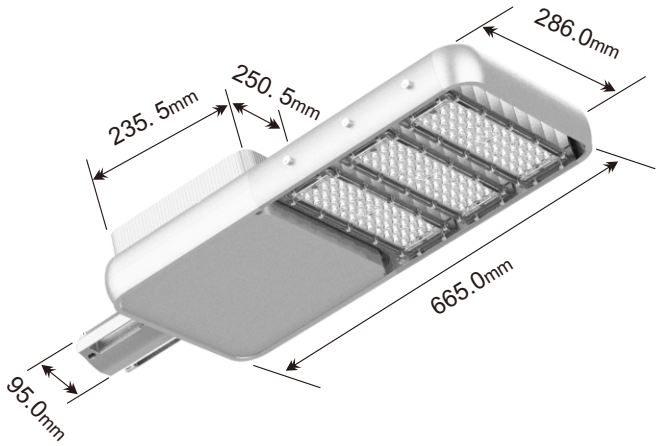

AN-SSL-I 50-60W

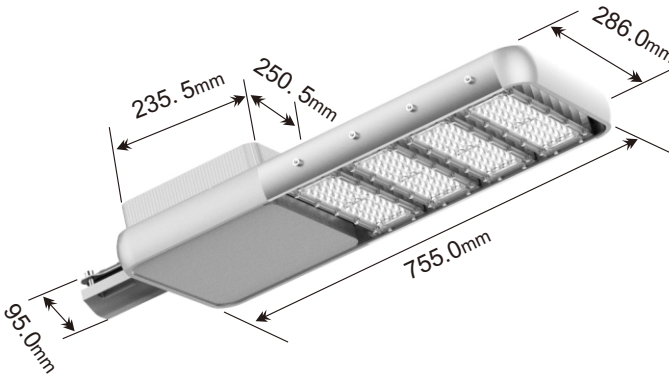


AN-SSL-I 80W

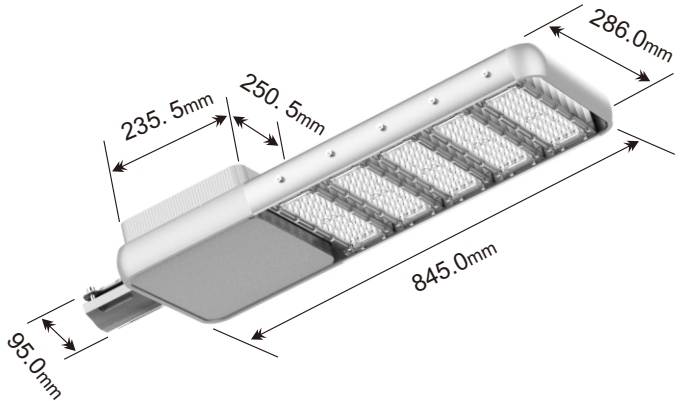

AN-SSL-I 100-120W


05 PART FIVE DETAIL

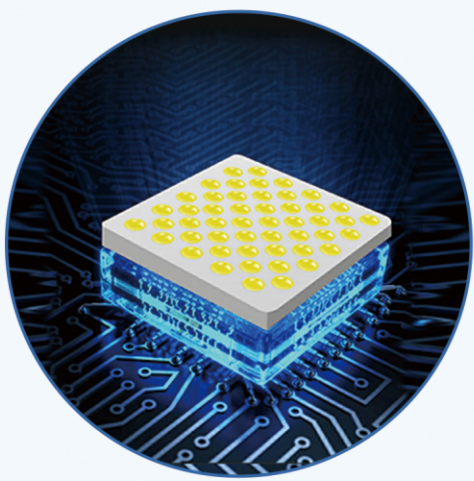

High brightness Bridgelux 3030
170lm/w



Intelligent Dimming
extend the lighting time

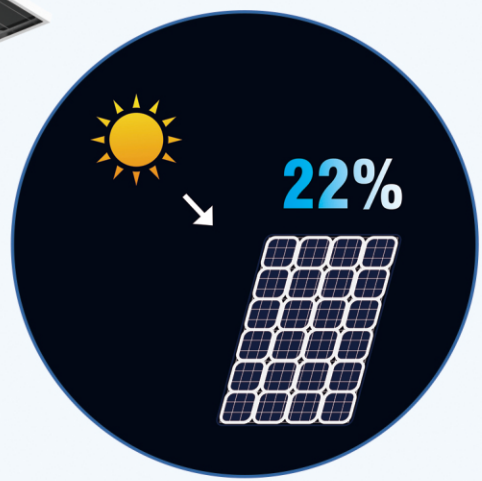

Monocrystalline solar panels
22% conversion efficiency



LiFePo4 Battery
long lifespan and big capacity



Remote
Control



Timely
Adjustment



Intelligent
Dimming

**Smart Control
System**

A N E R N / S T R E E T / L I G H T



THANKS
VERY
MUCH